

Wall Mounted LiFePO₄ Battery

LFP-W25.6-100 Lithium Battery



High Cycle Life
6000 cycles @80%DOD,25°C for effectively lower cost total of ownership.



Longer Service Life
Low maintenance batteries with stable chemistry.



Built In Circuit Protection
Battery Management System (BMS) is incorporated against abuse.



Better Storage
Up to 6 months thanks to its extremely low self discharge (LSD) rate and no risk of sulphation.




Quickly Recharge
Save time and increase productivity with less down time thanks to superior charge/discharge efficiency.



Extreme Heat Tolerance
Suitable for use in a wider range of applications where ambient temperature is unusually high: up to +60°C



Product Dimension Diagram

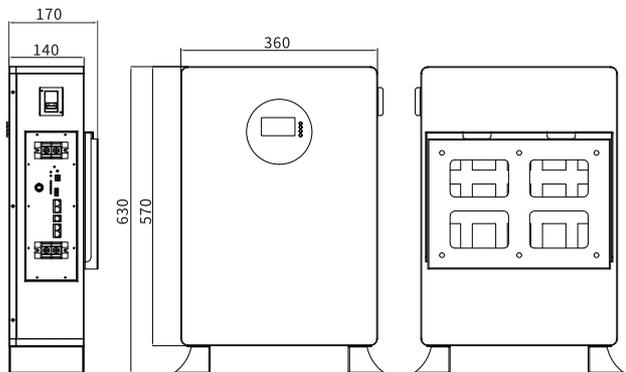

Application

- Electric vehicles.
- Solar/wind energy storage system.
- UPS, backup power.
- Telecommunication
- Medical equipment
- Lighting

FC IEC CE UN38.3 MSDS


Electrical Characteristics	
Nominal Voltage	25.6V
Nominal Capacity	100Ah (C ₅ ,25°C)
Energy	2560Wh
Internal Resistance	≤10mΩ@50%SOC
Cycle Life	>6000 cycles
Months Self Discharge	<3%
Efficiency of Charge	100%@0.5C
Efficiency of Discharge	96-99%@0.5C
Standard Charge	
Charge Mode	0.2C to 29.2V, then 29.2V, charge to current till 0.02C(CC/CV)
Continuous Current	50A
Recom. Charge Current	20A
Max. Charge Current	100A
Charge Cut-off Voltage	29.2V±0.2V
Standard Discharge	
Continuous Current	50A
Recom. Discharge Current	20A
Max. Discharge Current	100A
Discharge Cut-off Voltage	21.6V
Environmental	
Charge Temperature	0 °C to 45 °C (32°F to 113°F) @60±25% Relative Humidity
Discharge Temperature	-20 °C to 60 °C (-4°F to 140°F) @60±25% Relative Humidity
Storage Temperature	0 °C to 40 °C (32°F to 104°F) @60±25% Relative Humidity
IP Grade	IP54
Mechanical	
Cell & Method	3.2V100AH-8S1P
Metal Case	Metal
Dimensions (mm.)	570x360x140(Package:680x410x216)
Weight (kg.)	N.W.: 27.5Kg/G.W.: 31.6Kg
Terminal	100A Connector
Communication	RS485/RS232/CAN
BMS	8S100A
Parallel	Up to 16 units

Wall Mounted LiFePO₄ Battery


LFP-W25.6-100 Lithium Battery

» Model Performance Diagrams


Number of Cycles Vs. DOD

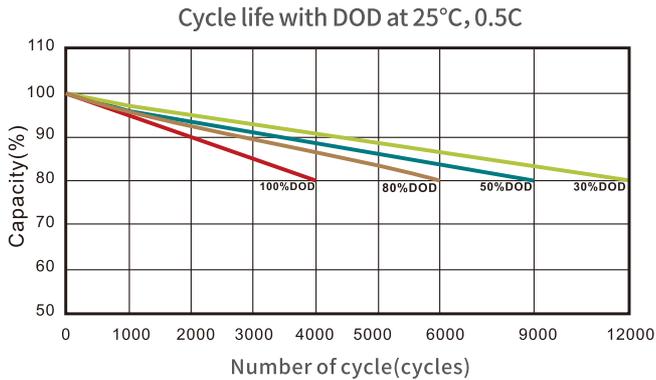


Discharge Performance at R.T.

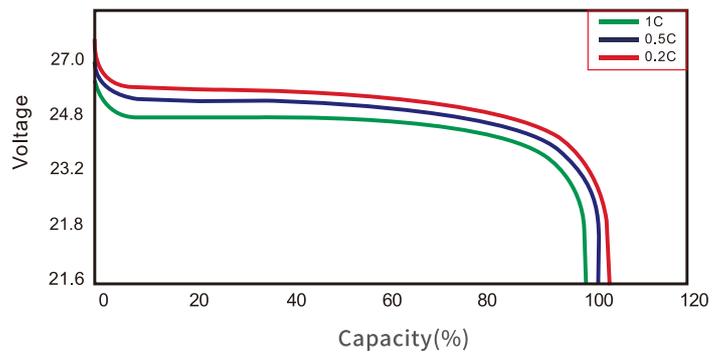


Battery Capacity (C) VS. Open Circuit Voltage (OCV)

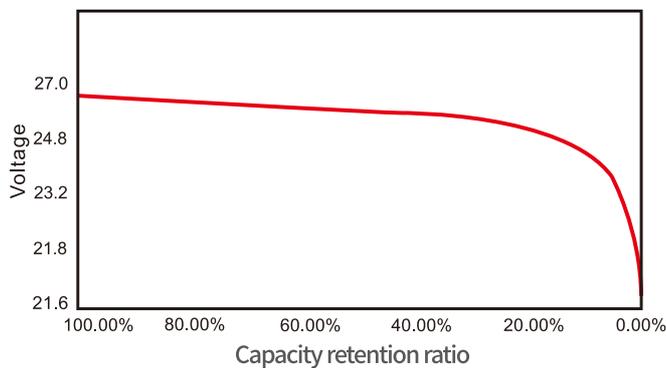

Battery Capacity Vs. Charging Time

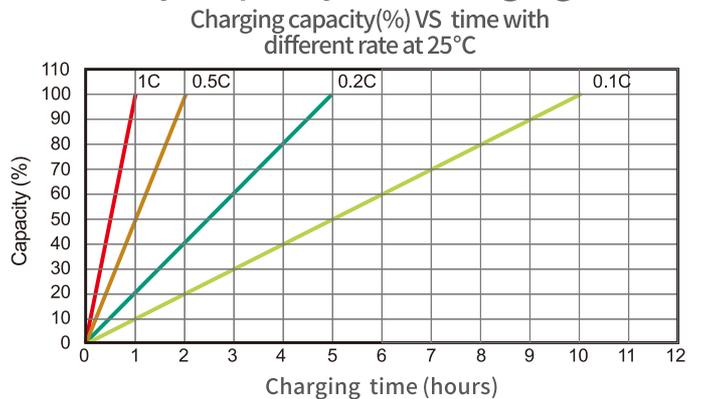

Cycle Life in Relation to Temperature

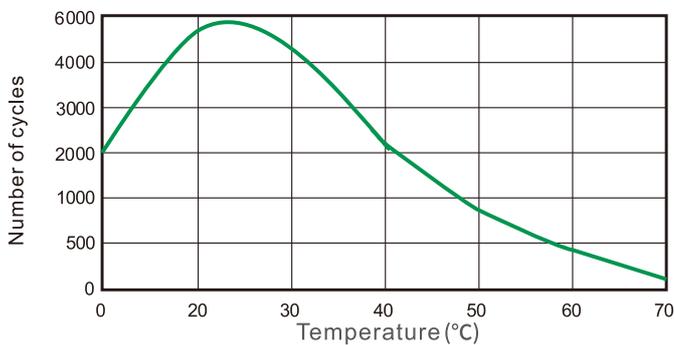

Temperature Effects on Capacity

